




## PARTS LIST - PCB ASSEMBLY #320275

**NOTE:** DATASETTE PARTS ARE NOT AVAILABLE FROM COMMODORE - parts list is for cross reference only.

INTERGRATED CIRCUITS		RESISTORS (Continued)	
IC1	LM 358 (T.I.) Sub: NA798 (Fairchild) Sub: LM258 (T.I.)	R16	10K
IC2	LM 358 (T.I.) Sub: NA798 (Fairchild) Sub: LM 258 (T.I.)	R17	2.2M
IC3	7414 Hex Inverter	R18	3.3K
<b>RESISTORS - All values are in ohms-1/4 W 5% unless noted otherwise.</b>		R19	2K
R1	10K	R20	1K
R2	10K	R21	470
R3	330K	R22	470
R4	330K	R23	10K
R5	2.7K	R24	220
R6	7.5K	<b>CAPACITORS</b>	
R7	47K	C1	Ceramic .1 $\mu$ F 16V
R8	47K	C2	Ceramic 180 pF 250V (+ -) 10%
R9	2.7K	C3	Ceramic .002 $\mu$ F 250V (+ -) 10%
R10	330K	C4	Ceramic .150 pF 250V (+ -) 10%
R11	2.9K	C5	Ceramic .1 $\mu$ F 16V
R12	47K	C6	Electrolytic 47 $\mu$ F 10V
R13	56K	C7	Electrolytic 47 $\mu$ F 10V
R14	2.7K	C8	Monolythic .47 $\mu$ F 50V
R15	10K	<b>MISC.</b>	
		SW1	Slide Switch SEA-621

## Schematic Circuit Diagram - PCB Assembly #320275

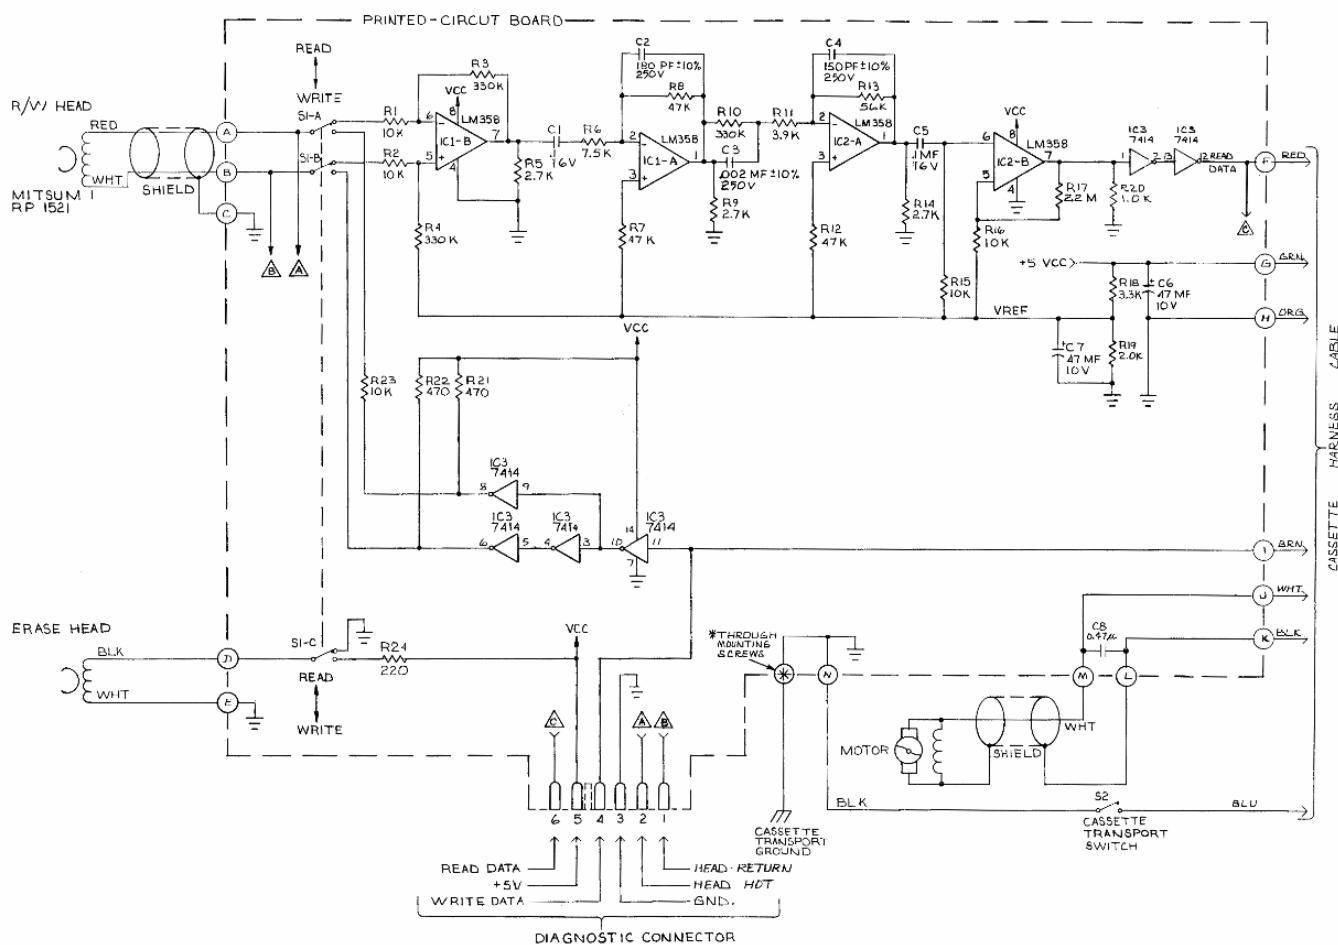

1. ALL RESISTANCE VALUES ARE IN OHMS, 1/4W,  $\pm 5\%$

NOTES: UNLESS OTHERWISE SPECIFIED -



Read the [small print](#).

This page has been created by [Sami Rautiainen](#).  
Last updated April 13, 2006.